

RE-755P / RE-756P Series

Conventional Manual Pull Station

General

RE-755P, RE-756P series Conventional pull station, these devices are wall-mounted devices that are located near the exit doors to allow the passers-by to manually trigger. It is a dual action pull station (i.e.) it requires two motions to activate, user has to lift the flap and push the handle for activation.

The red colour steady LED indicates activated condition. Conventional Pull Station is further classified with LED and without LED. Each has 4 variants with respect to the application like Fire, Release, Abort & Emergency release in Red, Green, Yellow & Blue colours and these devices are working with contact monitoring.

Features

- Complies UL 38 8th edition.
- Lift and push.
- Diagnostic LED for RE-756P series.
- Key lock access.
- Low Standby Current.



Construction Material


- Light weight FR-ABS housing.
- Terminal block (4 Position).

Specification

Specifications	RE-756P series	RE-755P series
<i>Operating Voltage</i>	24VDC	
<i>Alarm Current</i>	25mA Max ^a	50mA Max ^b
<i>Diagnostic LED</i>	Yes	No
<i>Switch Contact Rating</i>	500mA (Max)	
<i>Operating Temperature</i>	0 – 49°C	
<i>Storage Temperature</i>	0 – 60°C	
<i>Humidity</i>	0 - 93% non-condensing	
<i>Construction</i>	FR-ABS	
<i>Wire Size</i>	2.5mm ² (#12AWG) Max	
<i>Colour</i>	Red / Yellow / Green / Blue	
<i>Dimension (inches)</i>	5.5L x 4.1W x 1.1D	
<i>Weight</i>	125g Approx	


^a Activation current through 560 Ohms; ^b Activation by short circuit.

Dimensions

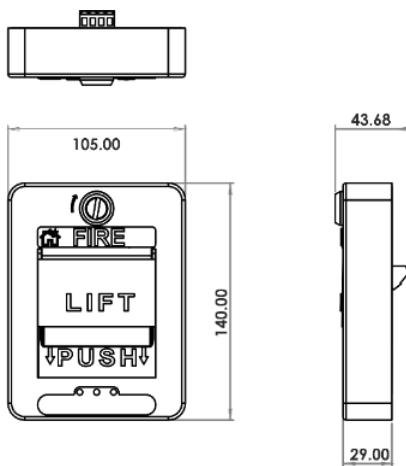

Wiring Diagram

The wiring terminal accepts solid or stranded cables up to 2.5 mm². Connect the pull station to positive & negative terminal, observing the polarity.

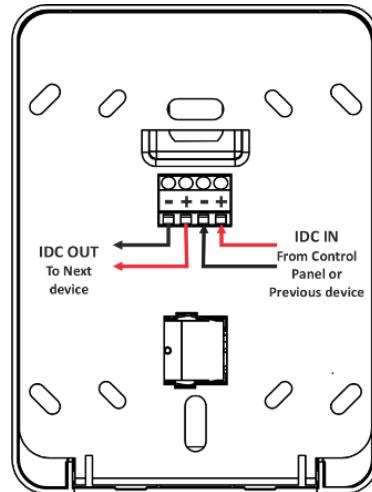

Ordering Information

Models	Description	With LED
RE-756P-R	Conventional pull station – Red - Alarm	✓
RE-756P-G	Conventional pull station – Green - Release	✓
RE-756P-Y	Conventional pull station – Yellow – Abort	✓
RE-756P-B	Conventional pull station – Blue – Door Release	✓
RE-755P-R	Conventional pull station – Red - Alarm	■
RE-755P-G	Conventional pull station – Green - Release	■
RE-755P-Y	Conventional pull station – Yellow – Abort	■
RE-755P-B	Conventional pull station – Blue – Door Release	-

India

RAVEL ELECTRONICS PVT LTD.,
150A, Electronics Industrial Estate,
Perungudi, Chennai – 96, India.
E-mail: sales@ravelfire.com; Web: www.ravelfire.com

UAE

RAVEL DMCC,
Unit No: G30, DMCC Business Center,
Level No 13, AG Tower, Dubai, UAE.
E-mail: sales@raveldmcc.com

USA

RAVEL AMERICAS INC.,
2855 NW 112th Ave ST#2 Miami,
Doral, Florida 33172, USA.
E-mail: sales.us@ravelfire.com